




QCT35 Series

SMD TCXO, 11.4x9.6x3.5mm, Clipped Sine Wave

Frequency	10.000 MHz. ~ 40.000 MHz								
Output Level	Clipped Sine Wave								
Level	1.0 Vp-p Min								
Output Load	20KΩ/10 pF								
Stability									
Frequency vs. Temperature	See Table below for Frequency Stability								
Frequency vs. Supply Voltage	±0.3 ppm Max ±5%								
Frequency vs. Load	±0.2 ppm Max								
Aging @ 25°C	± 1.0 ppm/year Max								
Tolerance @ 25°C	±0.5 ppm								
Supply Voltage	5.0VDC ±5%	3.3 Vdc ±5%							
Current	2.0 mA Max								
Temperature									
Operating	See Table below for Operating Temperature								
Storage	-40°C to +125°C								
	Frequency Stability in ± ppm								
Operating Temperature Range	Code	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0
0°C ~ +50°C	F	**	**	**	**	**	**	**	**
-10°C ~ +60°C	G	**	**	**	**	**	**	**	**
-10°C ~ +70°C	B		**	**	**	**	**	**	**
-20°C ~ +70°C	C		**	**	**	**	**	**	**
-30°C ~ +60°C	I			**	**	**	**	**	**
-30°C ~ +70°C	J			**	**	**	**	**	**
-30°C ~ +75°C	H			**	**	**	**	**	**
-40°C ~ +80°C	K					**	**	**	**
Part Number Guide	Sample Part #:	QCT35-FT3-20.000							
	Temperature Range	Frequency Stability	Supply Voltage		Frequency				
QCT35	F = 0°C ~ +50°C	T = ±2.0 ppm	3=3.3 Vdc or 5=5.0 Vdc		20.000 MHz				

** Indicates Availability

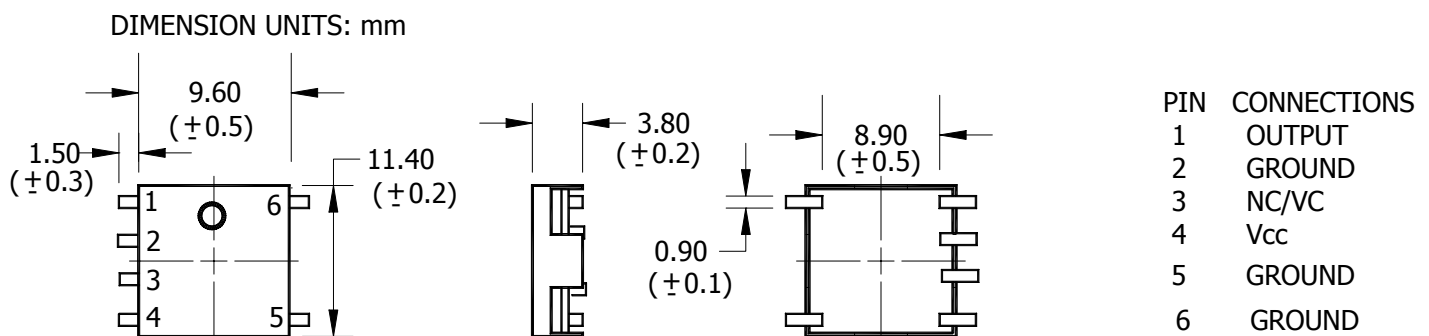

QVS TECH INC

6965 El Camino Real, Ste 105 Carlsbad, CA 92009 Phone: 760-929-8677 Fax: 760-929-8077

email: sales@qvstech.com

Specifications subject to change without notice (Rev A)